

nm² c' DPĐ

nc
p

c' DPĐ

v DPĐ

l' DPĐ

c' DPĐ

n' DPĐ


i' DPĐ

i' DPĐ' c' DPĐ' m' DPĐ' Q' DPĐ' p' DPĐ' #AIY' di4' ' DPĐ' kÔ4' ' DPĐ'

reliable clamping

for PET preform
are the fast
+ and
the mold.

© 2014 Y&D

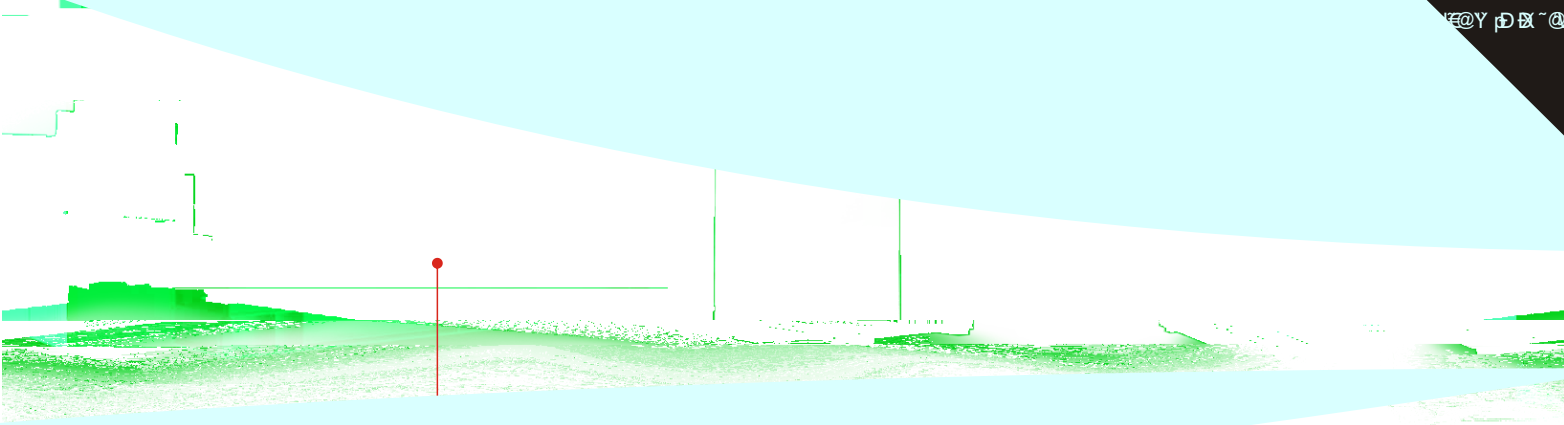

Servo motor drive hydraulic system

The hydraulic system was driven by a servo motor which ensure the lower energy consumption and sufficient hydraulic power supply.○

制系统 SIEMENS cont



Capacity Of Non-cutting PET Preform Mold

Water	L/min	100	100	120	125
Compressed Air	Mpa	0.7-0.9	0.7-0.9	0.7-0.9	0.7-0.9
	L/min	400	400	800	800
Machine Size(LxWxH)	cm	840x160x240	860x160x240	880x170x250	1020x210x250
	T	14	14	17	18

